

MR24xC-x07A03V2
7W MR16 GU10

ecolighting*



產品特色:

1. 4顆高效率LED
2. 無UV紫外線,對於畫與古董無傷害
3. 優異的熱傳導技術
4. 高壽命的LED
5. 7瓦特的MR16頭射燈的亮度等於50瓦特的鹵素燈泡,節省85%的電力


Features

1. Light source:4 pcs high power LED.
2. UV free, harmless for painting and antiques.
3. Excellent cooling system.
4. Long life time.
5. 7.0 Watt MR16 can achieve directional light output equal to 50 Watt halogen lamp consume 85% less power.



Specification

Model	MR242C-C07A03V2	MR242C-W07A03V2	MR244C-C07A03V2	MR244C-W07A03V2
Input Voltage	220~240Vac	220~240Vac	220~240Vac	220~240Vac
Frequency Range	50/60 HZ	50/60 HZ	50/60 HZ	50/60 HZ
Power Consumption	7.0W (typ.)	7.0W (typ.)	7.0W (typ.)	7.0W (typ.)
Emitting Color	Cool White	Warm White	Cool White	Warm White
Color Temperature	6000K (typ.)	2800K (typ.)	6000K (typ.)	2800K (typ.)
Luminous Flux	540 Lm (typ.)	450 Lm (typ.)	540 Lm (typ.)	450 Lm (typ.)
Color Rendering Index	75 (typ.)	85 (typ.)	75 (typ.)	85 (typ.)
Lifetime	>40,000hrs	>40,000hrs	>40,000hrs	>40,000hrs
Illuminance at 1m	1260 Lux (typ.)	1050 Lux (typ.)	912 Lux (typ.)	760 Lux (typ.)
Beam Angle	25°	25°	40°	40°
Operating Temperature	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C	-20°C~+40°C
Operating Humidity	20~80% RH	20~80% RH	20~80% RH	20~80% RH
Storage Temp. & Humidity	-30°C~+60°C 10~90% RH	-30°C~+60°C 10~90% RH	-30°C~+60°C 10~90% RH	-30°C~+60°C 10~90% RH
Dimensions	50 x 60mm (D x H)	50 x 60mm (D x H)	50 x 60mm (D x H)	50 x 60mm (D x H)
Fixed Material	Aluminum	Aluminum	Aluminum	Aluminum
Authenticate	CE	CE	CE	CE
Weight	54g	54g	54g	54g

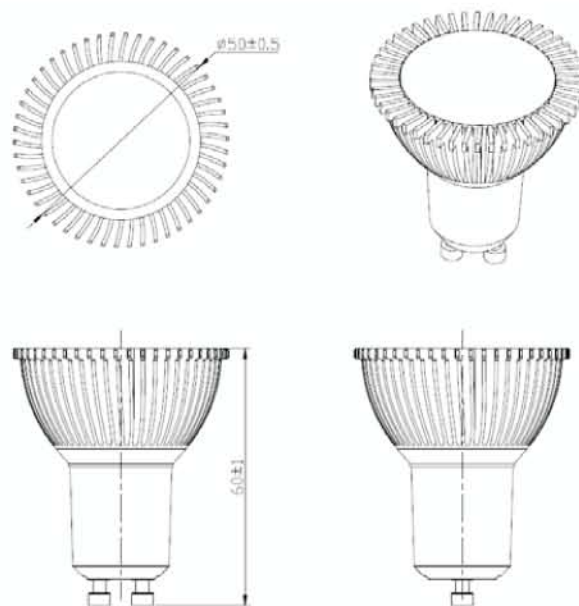

Note : Base type: GU10
Unit: mm