


# STC0577-C60A02

## 60W LED Flood Light

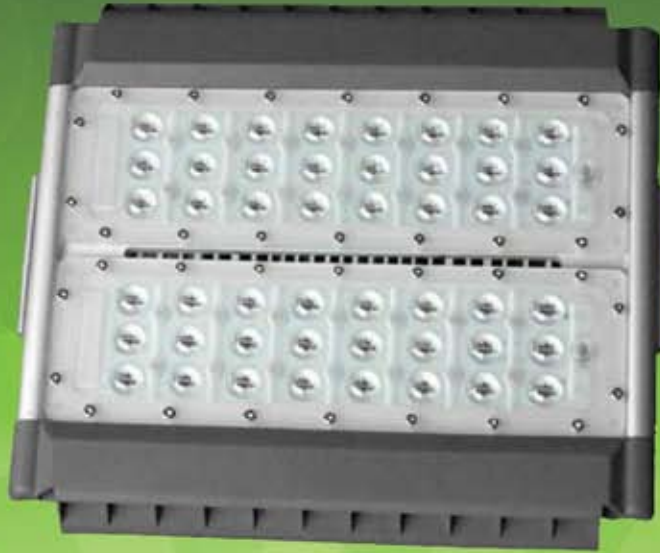


### 產品特色

1. 使用國際大廠高信賴性的LED。
2. 超過100流明的系統發光效率。
3. 支架設計，具有固定和角度調整功能。
4. IP65防護。
5. 符合CE和PSE安規。
6. 壽命比高壓鈉燈，金屬鹵化物和鹵素照明燈多3~5倍。


### Features

1. High power reliable LED used.
2. High system efficiency of more than 100 Lm/W.
3. Trestle design with fixed and angle-adjusted type.
4. IP65 protection.
5. Compliant with CE & PSE.
6. Lifespan is 3~5 times than lifespan of HPS, metal halide and halogen floodlight.

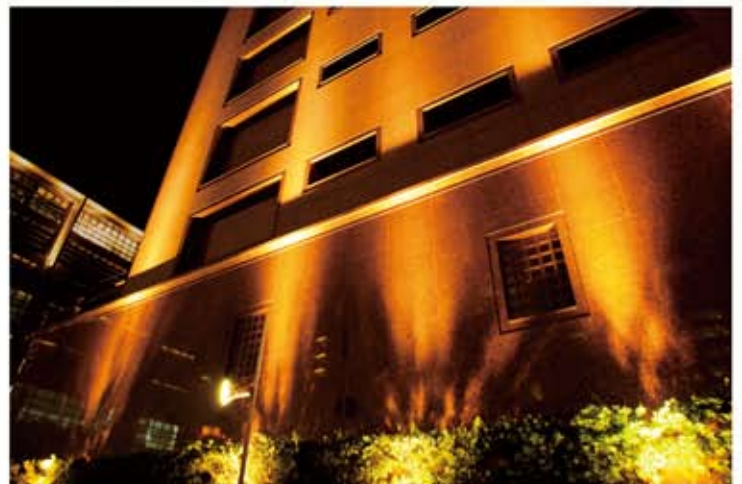

# Specification

Model	STC0577-C60A02	STC0577-W60A02
<b>Voltage Range</b>	100~240 Vac	100~240 Vac
<b>Frequency Range</b>	50/60 HZ	50/60HZ
<b>Power Consumption</b>	60W (typ.)	60W (typ.)
<b>Power Factor</b>	0.9 (min.)	0.9 (min.)
<b>Surge</b>	4kV (max.)	4kV (max.)
<b>Emitting Color</b>	Cool White	Warm White
<b>Color Temperature</b>	5000K (typ.)	3000K (typ.)
<b>Luminous Flux</b>	6000 Lm (typ.)	5100 Lm (typ.)
<b>Color Rendering Index</b>	70 (typ.)	80 (typ.)
<b>LED Lifetime (Decay to 70%)</b>	40,000hrs (min.)	40,000hrs (min.)
<b>Illuminance at 1m</b>	3920 Lux (typ.)	3320 Lux (typ.)
<b>Beam Angle (10%)</b>	75°	75°
<b>Operating Temperature</b>	-20°C~+50°C	-20°C~+50°C
<b>Operating Humidity</b>	5~95% RH	5~95% RH
<b>Fixture Material</b>	Aluminum	Aluminum
<b>Weight</b>	4.2kg	4.2kg
<b>IP Rating</b>	IP65	IP65
<b>Dimensions</b>	250mmx289.5mmx83.5mm	250mmx289.5mmx83.5mm

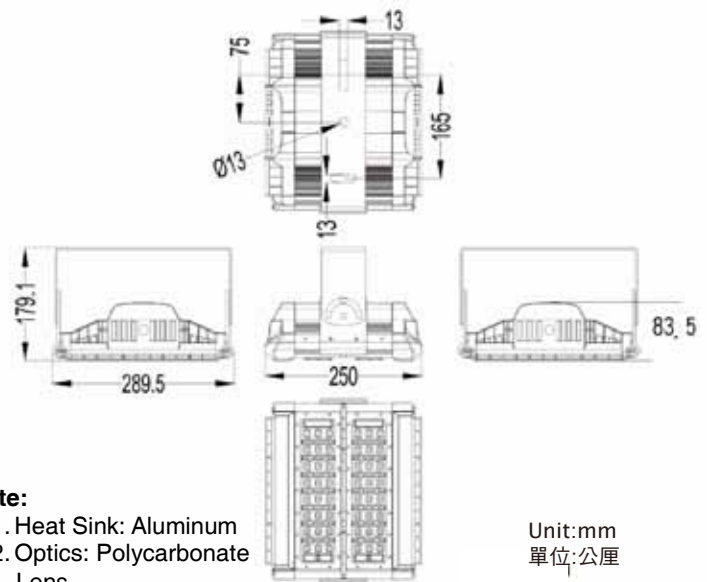

Ecolighting, Inc.

No.186-B1, Jian 1st Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.)

E-mail: sale@ecolighting.com.tw

TEL : 886-2-8228-0566 FAX : 886-2-8228-0577

ecolighting®